

## Pressure-resistant flow cell for Oxytrace G sensor

### B-Flow SS316L OTG

Flow cell made of stainless steel for one oxygen sensor Oxytrace G.

#### Technical data:

Cylindrical flow cell made of stainless steel SS316L.


1 insert for one oxygen sensor Oxytrace G.

Operating temperature: -10 .... +130 °C  
Sensor: max. 50 °C

Operating pressure: max. 5 bar at +130 °C  
Sensor: max. 5 bar

Connection: 2x female thread 1/8" ISO

Dimensions:  
Height: 102 mm  
Diameter: 52 mm  
Height with sensor and adapter: 128.6 mm

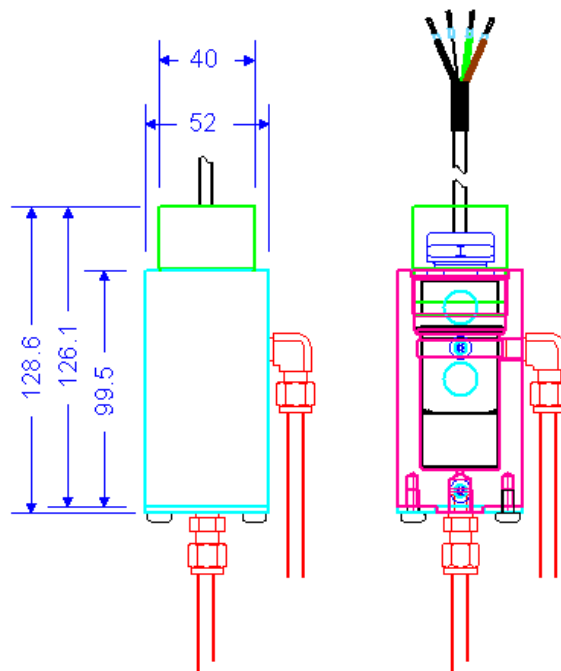

(Pictures with sensor, Swagelok connections, tubes, mounting angle and sensor adapter)

#### Delivery includes:

Flow cell B-Flow SS316L OTG, mounting angle and two M5 screws.

Process connections (2x Swagelok connection for 1/4" tube) and sensor adapter are **NOT** included in delivery.

Order number	B-flow SS316L OTG	A - 8 3 . 2 2 8 . 3 2 9
--------------	-------------------	-------------------------

#### Accessories:

C-86.530.060 Swagelok fitting 1/8 ISO male thread → 1/4" tube, straight  
C-86.530.090 Swagelok fitting 1/8 ISO male thread → 1/4" tube, 90° angle